

Made in Korea

 **TIRON**
Moving Forward

AGRICULTURAL TIRE **PATTERN GUIDE**

TRACTOR / FRONT / MULTI USE / LAWN & GARDEN
GOLF CART / TRAILER / ATV / MISCELLANEOUS



ISO 9001 | ISO 14001 | -MARK



HIGH PERFORMANCE AGRICULTURAL TIRE

TRACTOR / FRONT / MULTI USE / LAWN & GARDEN
GOLF CART / TRAILER / ATV / MISCELLANEOUS



ORIGINAL EQUIPMENT (OVERSEAS)



ORIGINAL EQUIPMENT (DOMESTIC)





INDEX

TRACTOR

621	10
616	10
620	11
601	12
600	13
458	13
617	14
603	15
632	16
602	16
605	16
532	17
501A	17

FRONT

618	17
-----------	----

MULTI USE

610	19
-----------	----

LAWN & GARDEN

482	21
-----------	----

GOLF CART

481	22
486	22
486A	22
487	22

TRAILER

611	23
-----------	----

ATV

619	23
-----------	----

MISCELLANEOUS

456	23
436	24
431A	24
459	24

AGRICULTURAL RADIAL TIRES

RIM DIAMETER (inches)	TIRE SIZE		PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE
20	280/85R20	11.2R20	616	10						
	300/70R20				621	10				
	380/70R20				621	10				
24	280/85R24	11.2R24	616	10						
	320/85R24	12.4R24	616	10						
	340/85R24	13.6R24	616	10						
	380/85R24	14.9R24	616	10						
	360/70R24				621	10				
	380/70R24				621	10				
28	340/85R28	13.6R28	616	10						
	380/85R28	14.9R28	616	10						
	420/85R28	16.9R28	616	10						
	480/70R28				621	10				
30	380/85R30	14.9R30	616	10						
	420/85R30	16.9R30	616	10						
	460/85R30	18.4R30	616	10						
34	420/85R34	16.9R34	616	10						
	460/85R34	18.4R34	616	10						
38	420/85R38	16.9R38	616	10						
	460/85R38	18.4R38	616	10						
	520/85R38	20.8R38	616	10						
	580/70R38		616	10						

AGRICULTURAL BIAS TIRES

RIM DIAMETER (inches)	TIRE SIZE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE
8	18X7.00-8	486A	22								
	18X8.50-8	481	22	482	21	486	22				
9	4.00-9	436	24								
10	22X7-10	619	23								
	20X8.00-10	610	19								
	18X8.50-10	482	21	610	19						
	20X10.00-10	431A	24								
	22X10-10	619	23								
12	4.00-12	436	24								
	5.00-12	501A	17								
	5-12	605	16								
	6.00-12	501A	17	602	16						
	6-12	458	13	603	15						
	165/60-12	610	19								
	7-12	458	13								
	190/50-12	487	22								
	23X8.50-12	482	21	610	19						
	10.0/80-12	611	23								
	26X10.00-12	456	23								
	26X12.00-12	482	21	610	19						
14	6-14	605	16								
	7-14	501A	17	617	14						
	25X8.50-14	482	21	610	19						
15	7.5L-15	601	12								

RIM DIAMETER (inches)	TIRE SIZE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE
15	27X8.50-15	482	21	610	19						
	27X10.50-15	482	21								
	27X12.50-15	610	19								
	28X8.50-15	482	21	610	19						
	29X12.50-15	482	21								
	36X13.50-15	482	21								
15.3	11.5/80-15.3	611	23								
16	6.00-16	501A	17								
	7-16	601	12	605	16	617	14				
	7.50-16	618	17								
	8-16	601	12	617	14						
	9.5-16	601	12	617	14						
	11.2-16	458	13								
16.5	13.6-16	482	21								
	10-16.5	610	19								
	12-16.5	610	19								
	33X12.50-16.5	482	21								
17.5	14-17.5	610	19								
18	8-18	617	14								
	9.5-18	603	15	617	14						
	10.5/80-18	610	19								
19.5	15-19.5	610	19								
20	8.3-20	603	15	617	14						
	9.5-20	601	12	603	15	617	14				
	11.2-20	601	12	617	14						
	41X14.00-20	482	21								
	43X16.00-20	610	19								
	44X18.00-20	482	21								
22	8.3-22	603	15								
	9.5-22	603	15								
24	8.3-24	600	13	632	16						
	9.5-24	603	15	617	14						
	11.2-24	601	12	617	14	620	11	602	16		
	12.4-24	601	12	603	15	617	14	620	11		
	13.6-24	601	12	603	15	617	14	620	11		
	14.9-24	532	17	601	12	610	19	617	14	620	11
	420/70-24	610	19								
	16.9-24	601	12	610	19						
	17.5L-24	610	19								
26	19.5L-24	610	19								
	120/90-26	459	24								
	12.4-26	603	15								
28	13.6-26	603	15	617	14						
	11.2-28	603	15								
	12.4-28	601	12	603	15	620	11				
	13.6-28	603	15	617	14	620	11				
	14.9-28	532	17	601	12	603	15	620	11	617	14
	16.9-28	620	11								
30	14.9-30	601	12	603	15	617	14	620	11		
	16.9-30	601	12	603	15	620	11	617	14		
	18.4-30	601	12	603	15	617	14	620	11		
32	12.4-32	603	15								
34	16.9-34	603	15	617	14	620	11				
	18.4-34	601	12	603	15	620	11	617	14		
36	13.6-36	603	15								
38	12.4-38	602	16								
	13.6-38	603	15	620	11						
	16.9-38	603	15								
	18.4-38	603	15	620	11						



HS621

RADIAL 70 SERIES
TRACTOR TIRES




HS620

R1 CATEGORY
TRACTOR TIRES

TECHNOLOGY HS621

COMFORT DRIVING & ENHANCED TRACTION



Flat tread profile design to enables an enhanced traction and comfort driving

REDUCED SOIL COMPACTION




Rounded shoulder designed for reduced soil compaction

SPECIAL COMPOUND



Optimized compounds applied to provides excellent cut & chip resistance

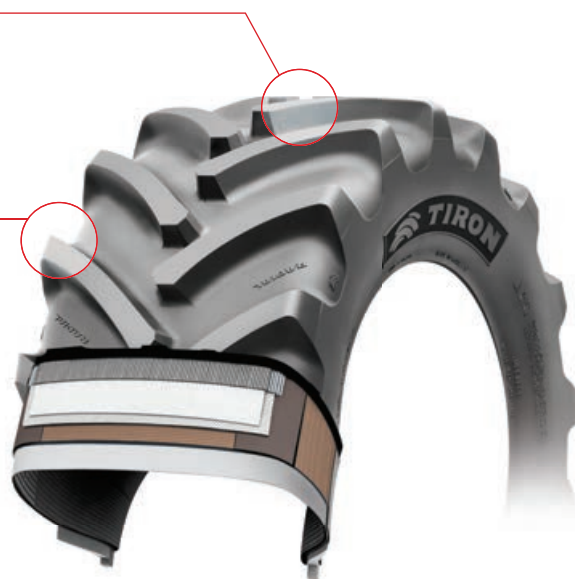

TECHNOLOGY HS620

OPTIMIZED TRACTION FOR SOIL TILLAGE



Rounded tread profile to provide suitable traction for soil tillage

NEW COMPOUND



New compound applied for longer mileage and enhanced abrasion resistance

COOLING GROOVE



Releasing heat efficiently through cooling groove





TRACTOR



621

616



NEW



> TRACTOR

621

***RADIAL TIRE**

SIZE	Load index Speed symbol	APPRVD. RIM	Permissible Rims (inch)	O.D.(mm)	O.W.(mm)	S.D.(mm)	LUG (ea)	MAX.LOAD		INFLATION	
								kg	lbs	kg/cm ²	psi
300/70R20	120A8	W9	W10	952	295	34.0	17	1400	3085	2.40	35
380/70R20	132A8	W12	W11, W13	1082	380	42.0	17	2000	4410	2.40	35
360/70R24	122A8	W11	W10, W12	1152	357	41.0	19	1500	3300	1.60	23
380/70R24	125A8	W12	W11, W13	1190	380	42.0	19	1650	3635	1.60	23
480/70R28	140A8	W15L	W14L, W16L	1421	479	49.0	19	2500	5510	1.60	23

616

***RADIAL TIRE**

SIZE	Load index Speed symbol	APPRVD. RIM	Permissible Rims (inch)	O.D.(mm)	O.W.(mm)	S.D.(mm)	LUG (ea)	MAX.LOAD		INFLATION	
								kg	lbs	kg/cm ²	psi
280/85R20 (11.2R20)	111A8	W10	W9	1000	280	40.0	18	1090	2403	1.60	23
280/85R24 (11.2R24)	114A8	W10	W9	1105	280	40.0	19	1180	2601	1.60	23
320/85R24 (12.4R24)	119A8	W11	W10, W9	1156	308	41.0	19	1360	2998	1.60	23
340/85R24 (13.6R24)	121A8	W12	W11	1190	345	43.0	19	1450	3197	1.60	23
380/85R24 (14.9R24)	126A8	W13	W12, W11	1245	378	44.0	19	1700	3748	1.60	23
340/85R28 (13.6R28)	123A8	W12	W11	1295	345	45.0	19	1550	3417	1.60	23
380/85R28 (14.9R28)	128A8	W13	W12, W11	1360	378	46.0	19	1800	3968	1.60	23
420/85R28 (16.9R28)	136A8	W15L	W14L	1420	433	47.0	19	2240	4938	1.60	23
380/85R30 (14.9R30)	129A8	W13	W12, W11	1400	378	45.0	20	1850	4078	1.60	23
420/85R30 (16.9R30)	137A8	W15L	W14L	1475	433	46.0	20	2300	5070	1.60	23
460/85R30 (18.4R30)	142A8	W16L	W15L	1545	467	49.0	20	2650	5842	1.60	23
420/85R34 (16.9R34)	139A8	W15L	W14L	1575	433	47.0	20	2430	5357	1.60	23
460/85R34 (18.4R34)	144A8	W16L	W15L	1645	467	50.0	20	2800	6172	1.60	23
420/85R38 (16.9R38)	141A8	W15L	W14L	1680	433	49.0	21	2575	5677	1.60	23
460/85R38 (18.4R38)	146A8	W16L	W15L	1750	467	50.0	21	3000	6614	1.60	23
520/85R38 (20.8R38)	153A8	W18L	W16L	1846	528	55.0	21	3650	8047	1.60	23
580/70R38	155A8	W18L	-	1835	560	56.0	21	3875	8540	1.60	23

TT = TUBE TYPE, TL = TUBELESS

620



620

*R1

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	S.D.(mm)	LUG (ea)	MAX.LOAD		INFLATION	
								kg	lbs	kg/cm ²	psi
11.2-24	8	T/T	W10	1110	280	32.0	18	1135	2500	2.40	34
12.4-24	8	T/T	W11	1160	320	33.0	18	1445	3185	2.20	32
13.6-24	8	T/T	W12	1200	345	34.5	18	1615	3560	2.20	32
14.9-24	8	T/T	W13	1255	378	34.5	18	1750	3860	1.80	26
12.4-28	8	T/T	W11	1260	320	33.0	19	1510	3330	2.20	32
13.6-28	8	T/T	W12	1310	335	35.0	19	1645	3625	2.00	28
	10	T/T	W12	1310	335	35.0	19	1910	4210	2.50	36
14.9-28	8	T/T	W13	1365	385	35.0	19	1865	4110	1.80	26
	10	T/T	W13	1365	385	35.0	19	2120	4675	2.30	33
16.9-28	8	T/T	W15L	1426	435	37.0	19	1950	4300	1.70	24
	10	T/T	W15L	1426	435	37.0	19	2430	5355	2.00	28
14.9-30	8	T/T	W13	1405	385	35.0	19	1930	4255	1.80	26
	10	T/T	W13	1405	385	35.0	19	2190	4830	2.30	33
16.9-30	8	T/T	W15L	1485	435	37.0	20	2245	4950	1.60	23
	10	T/T	W15L	1485	435	37.0	20	2730	6020	2.40	34
18.4-30	8	T/T	W16L	1550	480	38.0	20	2510	5535	1.60	23
	10	T/T	W16L	1550	480	38.0	20	2900	6395	1.80	26
16.9-34	8	T/T	W15L	1580	437	37.0	20	2385	5260	1.60	23
18.4-34	10	T/T	W16L	1650	480	38.0	20	2775	6120	1.60	23
13.6-38	8	T/T	W12	1565	345	35.0	23	1910	4210	2.00	28
18.4-38	8	T/T	W16L	1750	480	38.0	21	2715	5985	1.40	20
	10	T/T	W16L	1750	480	38.0	21	3160	6965	1.80	26

TT = TUBE TYPE, TL = TUBELESS



TRACTOR

601



601

***LONG MILEAGE R1**

SIZE	PR	TYPE	R.W. 	O.D.(mm) 	O.W.(mm) 	S.D.(mm) 	LUG (ea) 	MAX.LOAD 		INFLATION 	
								kg	lbs	kg/cm ²	psi
7.5L-15	6	T/T	6LB	772	222	23.0	17	800	1764	3.80	54
7-16	6	T/L	W6	740	183	25.0	16	500	1100	2.60	37
8-16	4	T/L	W6	790	201	25.0	16	475	1045	1.60	23
	6	T/L	W6	790	201	25.0	16	600	1325	2.40	34
9.5-16	6	T/L	8LB	848	248	30.0	16	725	1600	2.20	32
9.5-20	6	T/T	W8	946	240	31.0	18	840	1852	2.20	32
	6	T/L	W8	946	240	31.0	18	840	1852	2.20	32
11.2-20	8	T/T	W9	999	278	32.0	18	1120	2469	2.40	34
11.2-24	6	T/L	W10	1100	280	32.0	17	1045	2305	1.80	26
12.4-24	6	T/T	W11	1150	318	37.0	18	1200	2646	1.60	23
	6	T/L	W11	1150	318	37.0	18	1200	2646	1.60	23
	8	T/T	W11	1150	318	37.0	18	1445	3186	2.20	32
13.6-24	6	T/L	W12	1210	345	36.0	19	1340	2954	1.60	23
	8	T/L	W12	1210	345	36.0	19	1615	3560	2.20	32
	8	T/T	W12	1210	345	36.0	19	1615	3560	2.20	32
14.9-24	6	T/T	W13	1275	385	37.0	19	1510	3329	1.40	20
	6	T/L	W13	1275	385	37.0	19	1510	3329	1.40	20
16.9-24	6	T/T	W15L	1340	445	36.0	18	1550	3417	1.20	17
	6	T/L	W15L	1340	445	36.0	18	1550	3417	1.20	17
12.4-28	6	T/T	W11	1260	320	36.6	20	1275	2811	1.60	23
	6	T/L	W11	1260	320	36.6	20	1275	2811	1.60	23
	8	T/T	W11	1260	320	36.6	20	1510	3329	2.20	32
14.9-28	8	T/T	W13	1378	378	34.0	18	1865	4112	1.80	26
	10	T/T	W13	1378	378	34.0	18	2090	4608	2.20	32
	10	T/L	W13	1378	378	34.0	18	2090	4608	2.20	32
14.9-30	8	T/T	W13	1430	398	34.0	19	1930	4255	1.80	26
16.9-30	6	T/L	W15L	1490	445	36.0	21	1900	4189	1.20	17
	8	T/T	W15L	1490	445	36.0	21	2245	4949	1.60	23
18.4-30	8	T/T	W16L	1540	480	38.0	20	2510	5534	1.60	23
	12	T/L	W16L	1540	480	38.0	20	3250	7165	2.30	33
	14	T/T	W16L	1540	480	38.0	20	3405	7510	2.60	38
18.4-34	6	T/L	W16L	1645	490	38.0	22	2250	4960	1.20	17
	8	T/T	W16L	1645	490	38.0	22	2565	5655	1.40	20
	8	T/L	W16L	1645	490	38.0	22	2565	5655	1.40	20
	10	T/T	W16L	1645	490	38.0	22	2775	6118	1.60	23

TT = TUBE TYPE, TL = TUBELESS

600



458



600

*R1

SIZE	PR	TYPE	R.W. 	O.D.(mm) 	O.W.(mm) 	S.D.(mm) 	LUG (ea) 	MAX.LOAD 		INFLATION 	
								kg	lbs	kg/cm ²	psi
8.3-24	6	T/T	W7	1000	210	30.0	18	810	1786	2.40	34

458

*R1

SIZE	PR	TYPE	R.W. 	O.D.(mm) 	O.W.(mm) 	S.D.(mm) 	LUG (ea) 	MAX.LOAD 		INFLATION 	
								kg	lbs	kg/cm ²	psi
6-12	4	T/T	5JA	580	152	15.0	16	268	591	2.00	28
	4	T/L	5JA	580	152	15.0	16	268	591	2.00	28
7-12	6	T/T	5JA	615	168	18.5	17	390	860	2.30	33
	6	T/L	5JA	615	168	18.5	17	390	860	2.30	33
11.2-16	6	T/T	W10L	902	305	35.0	17	755	1665	2.20	32
	6	T/L	W10L	902	305	35.0	17	755	1665	2.20	32

TT = TUBE TYPE, TL = TUBELESS



TRACTOR

617



617

***LONG MILEAGE R1W**

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	S.D.(mm)	LUG (ea)	MAX.LOAD		INFLATION	
								kg	lbs	kg/cm ²	psi
160/90-12	4	T/T	4.00	632	158	26.0	13	325	716	1.80	26
7-14	6	T/T	5JA	690	173	26.0	14	440	970	2.40	34
7-16	6	T/T	W6	740	183	28.0	15	500	1102	2.60	37
8-16	6	T/T	W6	789	198	29.0	13	600	1323	2.40	34
9.5-16	6	T/T	W8	855	251	43.0	14	725	1598	2.20	32
8-18	8	T/T	W6	839	195	32.0	14	780	1720	3.20	46
9.5-18	8	T/T	W8	901	250	45.0	16	900	1984	2.80	40
8.3-20	8	T/T	W7	890	205	45.0	15	825	1819	3.20	46
9.5-20	8	T/T	W8	943	248	40.0	16	970	2138	2.80	40
11.2-20	8	T/T	W9	1005	297	48.0	14	1120	2469	2.40	34
9.5-24	8	T/T	W8	1050	241	43.5	16	1130	2491	3.00	43
11.2-24	8	T/T	W10	1120	297	49.0	15	1135	2502	2.40	34
12.4-24	8	T/T	W11	1175	308	50.0	16	1445	3186	2.20	32
13.6-24	8	T/T	W12	1210	345	54.0	16	1615	3560	2.20	32
14.9-24	8	T/T	W13	1265	378	50.0	15	1750	3858	1.80	26
13.6-26	8	T/T	W12	1260	345	55.0	15	1580	3483	2.00	28
13.6-28	8	T/T	W12	1310	345	53.5	16	1645	3627	2.00	28
14.9-28	8	T/T	W13	1365	390	55.5	16	1865	4112	1.80	26
14.9-30	8	T/T	W13	1419	384	55.0	17	1930	4255	1.80	26
16.9-30	8	T/T	W15L	1485	440	58.0	19	2245	4949	1.60	23
18.4-30	8	T/T	W16L	1536	465	55.0	19	2510	5534	1.60	23
16.9-34	8	T/T	W15L	1575	450	58.0	19	2385	5258	1.60	23
18.4-34	10	T/T	W16L	1635	467	55.0	20	2775	6118	1.60	23

TT = TUBE TYPE, TL = TUBELESS

603



603

*R1W

SIZE	PR	TYPE	R.W. 	O.D.(mm) 	O.W.(mm) 	S.D.(mm) 	LUG (ea) 	MAX.LOAD 		INFLATION 	
								kg	lbs	kg/cm ²	psi
6-12	4	T/T	5JA	600	155	15.0	16	270	590	2.00	28
9.5-18	6	T/T	W8	901	250	43.0	16	600	1323	1.40	20
	8	T/T	W8	901	250	43.0	16	900	1984	2.80	40
8.3-20	6	T/T	W7	890	202	43.0	15	710	1565	2.40	34
9.5-20	4	T/T	W8	943	240	42.0	16	645	1422	1.40	20
	6	T/T	W8	943	240	42.0	16	840	1852	2.20	32
	8	T/T	W8	943	240	42.0	16	970	2138	2.80	40
8.3-22	4	T/T	W7	935	212	43.0	16	600	1323	1.60	23
	6	T/T	W7	935	212	43.0	16	760	1675	2.40	34
9.5-22	4	T/T	W8	993	225	42.5	16	690	1521	1.40	20
	6	T/T	W8	993	225	42.5	16	900	1984	2.20	32
9.5-24	4	T/T	W7	1056	224	42.5	16	740	1631	1.40	20
	6	T/T	W7	1056	224	42.5	16	940	2072	2.20	32
12.4-24	6	T/T	W11	1156	315	48.5	16	1200	2646	1.60	23
	8	T/T	W11	1156	315	48.5	16	1445	3186	2.20	32
13.6-24	6	T/T	W12	1220	345	54.0	16	1340	2954	1.60	23
	8	T/T	W12	1220	345	54.0	16	1615	3560	2.20	32
12.4-26	4	T/T	W11	1220	318	60.0	14	970	2138	1.20	17
	6	T/T	W11	1220	318	60.0	14	1145	2524	1.60	23
13.6-26	4	T/L	W11	1268	341	54.0	15	1065	2348	1.00	14
	6	T/T	W11	1270	341	54.0	15	1400	3086	1.60	23
	8	T/T	W11	1270	341	54.0	15	1580	3483	2.00	28
11.2-28	8	T/T	W10	1205	292	48.0	16	1305	2877	2.40	34
12.4-28	6	T/T	W11	1248	317	48.5	17	1275	2811	1.60	23
	8	T/T	W11	1248	317	48.5	17	1510	3329	2.20	32
13.6-28	6	T/T	W12	1320	350	52.4	16	1430	3153	1.60	23
	8	T/T	W12	1320	350	52.4	16	1645	3627	2.00	28
14.9-28	6	T/T	W13	1378	385	54.8	16	1610	3549	1.40	20
	8	T/T	W13	1378	385	54.8	16	1865	4112	1.80	26
14.9-30	8	T/T	W13	1419	384	54.5	18	1930	4255	1.80	26
16.9-30	8	T/T	W15L	1490	445	58.0	19	2245	4949	1.60	23
18.4-30	8	T/T	W16L	1533	467	49.5	20	2510	5534	1.60	23
12.4-32	8	T/T	W11	1360	315	48.5	19	1545	3406	2.00	28
16.9-34	8	T/T	W15L	1575	445	58.0	20	2385	5258	1.60	23
18.4-34	10	T/T	W16L	1635	477	49.5	21	2775	6118	1.60	23
13.6-36	6	T/T	W12	1521	351	55.3	19	1615	3560	1.60	23
	8	T/T	W12	1521	351	55.3	19	1890	4167	2.00	28
13.6-38	8	T/T	W12	1570	350	56.5	20	1910	4211	2.00	28
16.9-38	8	T/T	W15L	1695	431	57.7	22	2520	5556	1.60	23
18.4-38	8	T/T	W16L	1758	467	49.5	22	2715	5985	1.40	20

TT = TUBE TYPE, TL = TUBELESS



632

602

605



632

***R1W**

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	S.D.(mm)	LUG (ea)	MAX.LOAD		INFLATION	
								kg	lbs	kg/cm ²	psi
8.3-24	6	T/T	W7	1000	214	38.0	14	810	1786	2.40	34

602

***R1W**

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	S.D.(mm)	LUG (ea)	MAX.LOAD		INFLATION	
								kg	lbs	kg/cm ²	psi
11.2-24	4	T/T	W10	1105	283	42.5	15	845	1863	1.20	17
	6	T/T	W10	1105	283	42.5	15	1045	2304	1.80	26
	8	T/T	W10	1105	283	42.5	15	1235	2723	2.40	34
12.4-38	8	T/T	W11	1515	315	37.0	24	1780	3924	2.20	32

605

***R1W**

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	S.D.(mm)	LUG (ea)	MAX.LOAD		INFLATION	
								kg	lbs	kg/cm ²	psi
5-12	4	T/T	4JA	545	127	22.0	12	220	485	2.40	34
6-14	4	T/T	5JA	648	157	22.5	14	305	672	2.00	28
	6	T/T	5JA	648	157	22.5	14	370	816	2.80	40
	6	T/L	5JA	648	157	22.5	14	370	816	2.80	40
7-16	4	T/T	5JA	740	175	27.2	15	405	893	1.80	26
	6	T/T	5JA	740	175	27.2	15	500	1102	2.60	37
	6	T/L	5JA	740	175	27.2	15	500	1102	2.60	37

TT = TUBE TYPE, TL = TUBELESS

532



501A



618



532

*R1W

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	S.D.(mm)	LUG (ea)	MAX.LOAD		INFLATION	
								kg	lbs	kg/cm ²	psi
14.9-24	6	T/T	W13	1268	385	49.0	15	1510	3329	1.40	20
	8	T/T	W13	1268	385	49.0	15	1750	3858	1.80	26

501A

*R1W

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	S.D.(mm)	LUG (ea)	MAX.LOAD		INFLATION	
								kg	lbs	kg/cm ²	psi
5.00-12	4	T/T	3.00	585	130	23.5	12	255	562	2.00	28
6.00-12	4	T/T	4.00	632	158	26.0	13	325	716	1.80	26
	4	T/L	4.00	632	158	26.0	13	325	716	1.80	26
7-14	4	T/T	5JA	690	170	25.0	14	370	816	1.80	26
	6	T/T	5JA	690	170	25.0	14	440	970	2.40	34
	6	T/L	5JA	690	170	25.0	14	440	970	2.40	34
6.00-16	4	T/T	4.00	735	165	26.0	13	420	926	2.00	28

> FRONT(F-2)

618

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	S.D.(mm)	LUG (ea)	MAX.LOAD		INFLATION	
								kg	lbs	kg/cm ²	psi
7.50-16	8	T/T	5.50	805	213	9.0	17	775	1710	3.70	52

* 4.00-15 / 5.00-15 / 6.50-16 / 7.50-18 / 6.00-19 _ TO BE READY IN THE NEAR FUTURE

TT = TUBE TYPE, TL = TUBELESS



MULTI USE




HS610

AGRI & INDUSTRIAL USE



PERFORMANCE RESULT

LONG TIRE LIFE & HIGH DURABILITY

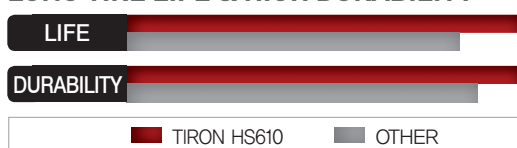

■ TIRON HS610 ■ OTHER

POWERFUL TRACTION



TECHNOLOGY

OVERLAPED WIDE CENTER LUG




Overlapped wide center lug for stable driving in widen contact and heavy load condition

DOUBLE LAYER PATTERN DESIGN



Double layer pattern design for self gravel cleaning

RECTANGULAR SHOULDER DESIGN



Rectangular shoulder design for better durability





> MULTI USE

610

*R4

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	S.D.(mm)	MAX.LOAD		INFLATION		REMARKS
							kg	lbs	kg/cm ²	psi	
18X8.50-10	4	T/L	7.00	453	200	13.0	370	816	1.50	22	
20X8.00-10	4	T/L	6.00	494	196	11.0	550	1213	2.80	40	
165/60-12	6	T/L	5.00	540	162	10.0	510	1125	3.20	46	
23X8.50-12	4	T/L	7.00	574	213	11.0	667	1470	2.50	36	
26X12.00-12	4	T/L	10.50	653	303	15.5	800	1764	1.40	20	
25X8.50-14	6	T/L	7.00	655	220	15.0	965	2130	3.50	50	
27X8.50-15	6	T/L	7JA	686	216	14.0	710	1565	3.10	45	
27X12.50-15	4	T/L	10.00	713	285	13.5	1060	2337	1.80	26	
28X8.50-15	6	T/L	7.00	715	225	15.0	1305	2875	3.10	45	
10-16.5	6	T/L	8.25	789	264	15.5	1610	3549	3.25	46	
12-16.5	4	T/L	9.75	830	310	15.5	1615	3560	2.10	30	
	6	T/L	9.75	830	310	15.5	1914	4220	2.80	40	
14-17.5	4	T/L	10.50	937	356	19.0	1700	3748	1.40	20	
	6	T/L	10.50	937	356	19.0	2185	4817	2.10	30	
	14	T/L	10.50	937	356	19.0	3875	8540	5.60	80	SKID STEER
10.5/80-18	6	T/L	W9	907	270	23.0	1450	3195	2.20	32	
15-19.5	6	T/L	11.75	1019	389	21.0	2780	6130	2.10	30	
	8	T/L	11.75	1019	389	21.0	3290	7250	2.80	40	
43X16.00-20	4	T/L	W14L	1110	410	21.0	1340	2950	1.40	20	
	6	T/L	W14L	1110	410	21.0	1685	3720	2.10	30	
14.9-24	6	T/L	W13	1236	382	28.0	1950	4300	1.70	24	
420/70-24	6	T/L	W15L	1193	443	27.0	1795	3960	1.40	20	
16.9-24	6	T/L	W15L	1313	442	27.0	2240	4940	1.50	22	
	10	T/L	W15L	1313	442	27.0	2900	6390	2.20	32	BACKHOE
	12	T/L	W15L	1313	442	27.0	3250	7160	2.65	38	
17.5L-24	6	T/L	W15L	1241	445	26.0	2000	4409	1.40	20	
	12	T/L	W15L	1241	445	26.0	3000	6610	2.55	36	BACKHOE
19.5L-24	6	T/L	W16L	1314	480	26.5	2725	6007	1.65	23	
	12	T/L	W16L	1314	480	26.5	3450	7600	2.40	34	BACKHOE

TT = TUBE TYPE, TL = TUBELESS




HS482

TURF & LAWN



PERFORMANCE RESULT

LONG TIRE LIFE & HIGH DURABILITY

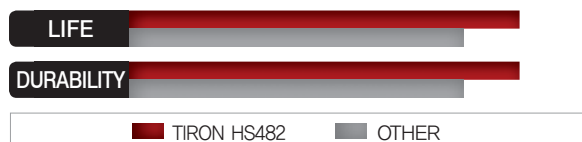


POWERFUL TRACTION



TECHNOLOGY

DEEP AND NARROW PATTERN DESIGN



Deep and narrow pattern arrangement for excellent traction on turf and snowy road

ROUND SHAPE SHOULDER



Round shape shoulder for minimizing turf damage

BIGGER TREAD RADIUS



Bigger tread radius comparing land contact for superb traction and braking power





> LAWN & GARDEN

482

***R3**

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	S.D.(mm)	MAX.LOAD		INFLATION	
							kg	lbs	kg/cm ²	psi
18X8.50-8	4	T/L	7.00	453	202	9.0	370	816	1.50	22
18X8.50-10	4	T/L	7.00	453	200	7.5	370	816	1.50	22
23X8.50-12	4	T/L	7.00	575	214	9.0	506	1116	1.50	22
	6	T/L	7.00	575	214	9.0	653	1440	2.40	34
26X12.00-12	4	T/L	10.50	655	302	12.0	807	1779	1.40	20
25X8.50-14	6	T/L	7.00	643	220	8.8	745	1642	2.20	32
27X8.50-15	4	T/L	7.00	680	214	9.0	560	1235	2.10	30
	6	T/L	7.00	680	214	9.0	775	1709	2.50	36
27X10.50-15	4	T/L	8.00	691	259	9.0	600	1323	2.10	30
28X8.50-15	4	T/L	7.00	711	215	9.0	650	1433	2.10	30
29X12.50-15	4	T/L	10.00	742	300	9.5	600	1323	1.40	20
36X13.50-15	4	T/L	10.00	914	360	9.5	1180	2601	1.40	20
13.6-16	4	T/L	12.00	980	365	19.0	710	1565	1.00	14
33X12.50-16.5	4	T/L	9.75	830	315	9.5	1061	2339	2.10	30
41X14.00-20	4	T/L	11.00	1067	369	17.5	1415	3119	1.80	26
44X18.00-20	4	T/L	14.00	1150	464	20.0	1550	3420	1.40	20

TT = TUBE TYPE, TL = TUBELESS



481



486



486A



487



> **GOLF CART**

481

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	MAX.LOAD		INFLATION	
						kg	lbs	kg/cm ²	psi
18X8.50-8	4	T/L	7.00	452	213	370	816	1.50	22
	6	T/L	7.00	452	213	475	1047	2.30	33

486

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	MAX.LOAD		INFLATION	
						kg	lbs	kg/cm ²	psi
18X8.50-8	6	T/L	7.00	455	210	475	1047	2.40	34

486A

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	MAX.LOAD		INFLATION	
						kg	lbs	kg/cm ²	psi
18X7.00-8	6	T/L	5.20	450	175	420	926	3.10	45

487

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	MAX.LOAD		INFLATION	
						kg	lbs	kg/cm ²	psi
190/50-12	6	T/L	6.00	510	185	550	1213	3.20	46

TT = TUBE TYPE, TL = TUBELESS



611



619



NEW

456



> TRAILER

611

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	MAX.LOAD		INFLATION	
						kg	lbs	kg/cm ²	psi
10.0/80-12	8	T/L	7.00	700	245	1250	2756	3.20	46
11.5/80-15.3	10	T/L	9.00	840	295	1950	4299	3.50	50

> ATV

619

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	S.D.(mm)	LUG (ea)	MAX.LOAD		INFLATION	
								kg	lbs	kg/cm ²	psi
22X7-10	4	T/T	5.50	560	170	9	23	100	220	0.35	5
22X10-10	4	T/T	8.00	560	250	10.5	24	136	300	0.35	5

> MISCELLANEOUS

456

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	MAX.LOAD		INFLATION	
						kg	lbs	kg/cm ²	psi
26X10.00-12	8	T/T	8.50	660	260	980	2160	3.75	53

TT = TUBE TYPE, TL = TUBELESS



436



431A



459



436

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	MAX.LOAD		INFLATION	
						kg	lbs	kg/cm ²	psi
4.00-9	2	T/T	3.00	460	111	110	243	1.20	17
	4	T/T	3.00	460	111	200	440	3.25	46
4.00-12	2	T/T	3.00	535	111	140	309	1.20	17
	4	T/T	3.00	535	111	250	551	3.25	46

431A

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	MAX.LOAD		INFLATION	
						kg	lbs	kg/cm ²	psi
20X10.00-10	6	T/T	8.50	508	240	565	1246	2.80	40

459

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	MAX.LOAD		INFLATION	
						kg	lbs	kg/cm ²	psi
120/90-26	4	T/T	4JA	940	123	525	1157	2.40	34
	6	T/T	4JA	940	123	600	1323	3.00	43

TT = TUBE TYPE, TL = TUBELESS





77, Eosil-ro, Yangsan-si
Gyeongsangnam-do, Korea
T 82-55-371-3731, 3734, 3735, 3785
F 82-55-366-4700
www.hunga.com/eng