

Made in Korea

AGRICULTURAL TIRES

TRACTOR / FRONT /
HYBRID / LAWN & GARDEN /
GOLF CART / TRAILER / ATV /
MISCELLANEOUS



ISO 9001 | ISO 14001 | -MARK

 **TIRON**
Moving Forward

HUNG-A CO.,LTD

CORPORATE OFFICE

77, Eosil-ro, Yangsan-si Gyeongsangnam-do, Korea
T 82-55-371-3731, 3734, 3735, 3785 F 82-55-366-4700
www.hunga.com/eng

USA OFFICE


TIRON TIRES AND WHEELS USA INC.

760 Atlanta South PKWY, Suite 100 College Park, GA 30349
T 470-365-2115 F 470-365-2116
www.tirontires.com

HIGH PERFORMANCE AGRICULTURAL TIRE

TRACTOR / FRONT / HYBRID / LAWN & GARDEN
GOLF CART / TRAILER / ATV / MISCELLANEOUS

ORIGINAL EQUIPMENT

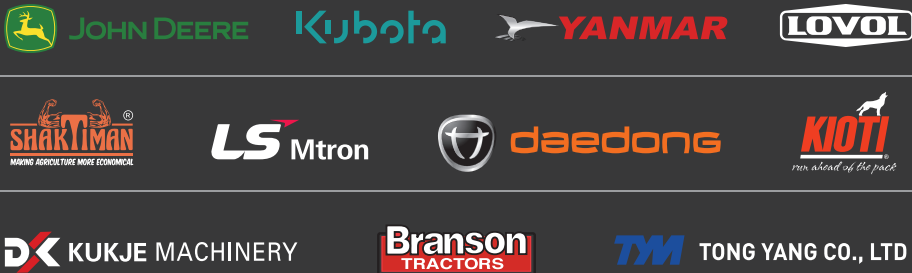

INDEX

TRACTOR	621	08
	616	08
	620	09
	601	10
	600	11
	458	11
	617	12
	603	13
	632	14
	602	14
	605	14
	532	15
	501A	15
FRONT	618	15
HYBRID	623	17
LAWN & GARDEN	482	18
	610	19
GOLF CART	481	20
	486	20
	486A	20
	487	20
TRAILER	611	21
ATV	619	21
MISCELLANEOUS	456	21
	436	22
	431A	22
	459	22

AGRICULTURAL RADIAL TIRES

RIM DIAMETER (inches)	TIRE SIZE		PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE
20	280/85R20	11.2R20	616	08						
	300/70R20				621	08				
	380/70R20				621	08				
24	280/85R24	11.2R24	616	08						
	320/85R24	12.4R24	616	08						
	340/85R24	13.6R24	616	08						
	380/85R24	14.9R24	616	08						
	360/70R24				621	08				
28	380/70R24				621	08				
	340/85R28	13.6R28	616	08						
	380/85R28	14.9R28	616	08						
	420/85R28	16.9R28	616	08						
30	480/70R28				621	08				
	380/85R30	14.9R30	616	08						
	420/85R30	16.9R30	616	08						
	460/85R30	18.4R30	616	08						
34	420/85R34	16.9R34	616	08						
	460/85R34	18.4R34	616	08						
38	420/85R38	16.9R38	616	08						
	460/85R38	18.4R38	616	08						
	520/85R38	20.8R38	616	08						
	580/70R38		616	08						

AGRICULTURAL BIAS TIRES

RIM DIAMETER (inches)	TIRE SIZE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE
8	18X7.00-8	486A	20								
	18X8.50-8	481	20	482	18	486	20				
9	4.00-9	436	22								
10	22X7-10	619	21								
	20X8.00-10	610	19								
	18X8.50-10	482	18	610	19	623	17				
	20X8.00-10	482	18								
	20X10.00-10	431A	22								
	22X10-10	619	21								
12	4.00-12	436	22								
	5.00-12	501A	15								
	5-12	605	14								
	6.00-12	501A	15	602	14						
	6-12	458	11	603	13						
	165/60-12	610	19								
	7-12	458	11								
	160/90-12	617	12								
	190/50-12	487	20								
	23X8.50-12	482	18	610	19	623	17				
	10.0/80-12	611	21								
	26X10.00-12	456	21								
	26X12.00-12	482	18	610	19	623	17				
14	6-14	605	14								
	7-14	501A	15	617	12						
	25X8.50-14	482	18	610	19	623	17				
15	7.5L-15	601	10								

RIM DIAMETER (inches)	TIRE SIZE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE
15	27X8.50-15	482	18	610	19						
	27X10.50-15	482	18								
	27X12.50-15	610	19								
	28X8.50-15	482	18	610	19						
	29X12.50-15	482	18								
	36X13.50-15	482	18								
15.3	11.5/80-15.3	611	21								
16	6.00-16	501A	15								
	7-16	601	10	605	14	617	12				
	7.50-16	618	15								
	8-16	601	10	617	12						
	9.5-16	601	10	617	12						
	11.2-16	458	11								
16.5	345/80-16	482	18								
	10-16.5	610	19	623	17						
	12-16.5	610	19	623	17						
	33X12.50-16.5	482	18								
17.5	14-17.5	610	19	623	17						
18	8-18	617	12								
	9.5-18	603	13	617	12						
	10.5/80-18	610	19								
19.5	15-19.5	610	19								
20	8.3-20	603	13	617	12						
	9.5-20	601	10	603	13	617	12				
	11.2-20	601	10	617	12						
	41X14.00-20	482	18								
	43X16.00-20	610	19	623	17						
	44X18.00-20	482	18								
22	8.3-22	603	13								
	9.5-22	603	13	620	09						
	8.3-24	600	11	632	14						
24	9.5-24	603	13	617	12	620	09				
	11.2-24	601	10	617	12	620	09				
	12.4-24	601	10	603	13	617	12	620	09		
	13.6-24	601	10	603	13	617	12	620	09		
	14.9-24	532	15	601	10	610	19	617	12	620	09
	420/70-24	610	19								
	16.9-24	601	10	610	19						
	17.5L-24	610	19								
	19.5L-24	610	19								
26	120/90-26	459	22								
	12.4-26	603	13								
	13.6-26	603	13	617	12						
28	11.2-28	603	13								
	12.4-28	601	10	603	13	620	09				
	13.6-28	603	13	617	12	620	09				
	14.9-28	532	15	601	10	603	13	620	09	617	12
	16.9-28	620	09								
30	14.9-30	601	10	603	13	617	12	620	09		
	16.9-30	601	10	603	13	620	09	617	12		
	18.4-30	601	10	603	13	617	12	620	09		
32	12.4-32	603	13								
34	16.9-34	603	13	617	12	620	09				
	18.4-34	601	10	603	13	620	09	617	12		
36	13.6-36	603	13								
38	12.4-38	602	14								
	13.6-38	603	13	620	09						
	16.9-38	603	13								
	18.4-38	603	13	620	09						



HS621
RADIAL 70 SERIES
TRACTOR TIRES

HS620
R1 CATEGORY
TRACTOR TIRES

TECHNOLOGY

HS621

COMFORT DRIVING & ENHANCED TRACTION



Flat tread profile design to enables an enhanced traction and comfort driving

REDUCED SOIL COMPACTION




Rounded shoulder designed for reduced soil compaction

SPECIAL COMPOUND



Optimized compounds applied to provides excellent cut & chip resistance

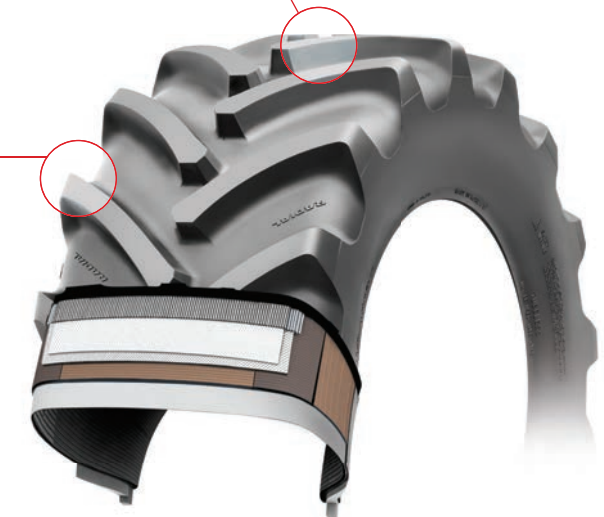

TECHNOLOGY

HS620

OPTIMIZED TRACTION FOR SOIL TILLAGE



Rounded tread profile to provide suitable traction for soil tillage

NEW COMPOUND




New compound applied for longer mileage and enhanced abrasion resistance

COOLING GROOVE



Releasing heat efficiently through cooling groove

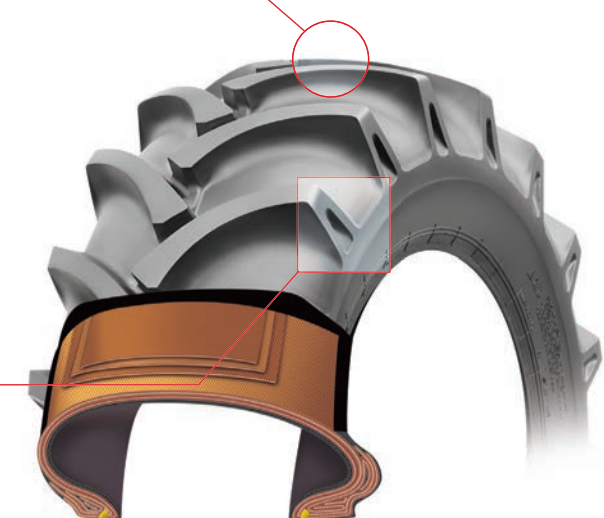



621



616



620



> TRACTOR

621

*RADIAL TIRE

SIZE	Load index Speed symbol	APPRVD. RIM	Permissible Rims (inch)	O.D.(mm)	O.W.(mm)	S.D.(mm)	LUG (ea)	MAX.LOAD		INFLATION	
								kg	lbs	kg/cm ²	psi
300/70R20	120A8	W9	W10	952	295	34.0	17	1400	3085	2.40	35
380/70R20	132A8	W12	W11, W13	1082	380	42.0	17	2000	4410	2.40	35
360/70R24	122A8	W11	W10, W12	1152	357	41.0	19	1500	3300	1.60	23
380/70R24	125A8	W12	W11, W13	1190	380	42.0	19	1650	3635	1.60	23
480/70R28	140A8	W15L	W14L, W16L	1421	479	49.0	19	2500	5510	1.60	23

616

*RADIAL TIRE

SIZE	Load index Speed symbol	APPRVD. RIM	Permissible Rims (inch)	O.D.(mm)	O.W.(mm)	S.D.(mm)	LUG (ea)	MAX.LOAD		INFLATION	
								kg	lbs	kg/cm ²	psi
280/85R20 (11.2R20)	111A8	W10	W9	1000	280	40.0	18	1090	2403	1.60	23
280/85R24 (11.2R24)	114A8	W10	W9	1105	280	40.0	19	1180	2601	1.60	23
320/85R24 (12.4R24)	119A8	W11	W10, W9	1156	308	41.0	19	1360	2998	1.60	23
340/85R24 (13.6R24)	121A8	W12	W11	1190	345	43.0	19	1450	3197	1.60	23
380/85R24 (14.9R24)	126A8	W13	W12, W11	1245	378	44.0	19	1700	3748	1.60	23
340/85R28 (13.6R28)	123A8	W12	W11	1295	345	45.0	19	1550	3417	1.60	23
380/85R28 (14.9R28)	128A8	W13	W12, W11	1360	378	46.0	19	1800	3968	1.60	23
420/85R28 (16.9R28)	136A8	W15L	W14L	1420	433	47.0	19	2240	4938	1.60	23
380/85R30 (14.9R30)	129A8	W13	W12, W11	1400	378	45.0	20	1850	4078	1.60	23
420/85R30 (16.9R30)	137A8	W15L	W14L	1475	433	46.0	20	2300	5070	1.60	23
460/85R30 (18.4R30)	142A8	W16L	W15L	1545	467	49.0	20	2650	5842	1.60	23
420/85R34 (16.9R34)	139A8	W15L	W14L	1575	433	47.0	20	2430	5357	1.60	23
460/85R34 (18.4R34)	144A8	W16L	W15L	1645	467	50.0	20	2800	6172	1.60	23
420/85R38 (16.9R38)	141A8	W15L	W14L	1680	433	49.0	21	2575	5677	1.60	23
460/85R38 (18.4R38)	146A8	W16L	W15L	1750	467	50.0	21	3000	6614	1.60	23
520/85R38 (20.8R38)	153A8	W18L	W16L	1846	528	55.0	21	3650	8047	1.60	23
580/70R38	155A8	W18L	-	1835	560	56.0	21	3875	8540	1.60	23

620

*R1

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	S.D.(mm)	LUG (ea)	MAX.LOAD		INFLATION	
								kg	lbs	kg/cm ²	psi
9.5-22	8	T/T	W8	997	241	28.0	19	1090	2405	3.00	43
9.5-24	8	T/T	W8	1048	241	30.0	20	1130	2490	3.00	43
11.2-20	8	T/T	W10	1000	280	32.5	16	1120	2470	2.40	34
11.2-24	8	T/T	W10	1110	280	32.0	18	1135	2500	2.40	34
12.4-24	8	T/T	W11	1160	320	33.0	18	1445	3185	2.20	32
13.6-24	8	T/T	W12	1200	345	34.5	18	1615	3560	2.20	32
14.9-24	8	T/T	W13	1255	378	34.5	18	1750	3860	1.80	26
12.4-28	6	T/T	W11	1260	320	33.0	19	1275	2810	1.60	23
	8	T/T	W11	1260	320	33.0	19	1510	3330	2.20	32
13.6-28	8	T/T	W12	1310	335	35.0	19	1645	3625	2.00	28
	10	T/T	W12	1310	335	35.0	19	1910	4210	2.50	36
14.9-28	8	T/T	W13	1365	385	35.0	19	1865	4110	1.80	26
	10	T/T	W13	1365	385	35.0	19	2120	4675	2.30	33
16.9-28	6	T/L	W15L	1426	435	37.0	19	1830	4035	1.30	18
	8	T/T	W15L	1426	435	37.0	19	1950	4300	1.70	24
	10	T/T	W15L	1426	435	37.0	19	2430	5355	2.00	28
	10	T/L	W15L	1426	435	37.0	19	2430	5355	2.00	28
14.9-30	8	T/T	W13	1405	385	35.0	19	1930	4255	1.80	26
	10	T/T	W13	1405	385	35.0	19	2190	4830	2.30	33
16.9-30	8	T/T	W15L	1485	435	37.0	20	2245	4950	1.60	23
	10	T/T	W15L	1485	435	37.0	20	2730	6020	2.40	34
	14	T/T	W15L	1485	435	37.0	20	2850	6285	2.60	37
18.4-30	8	T/T	W16L	1550	480	38.0	20	2510	5535	1.60	23
	10	T/T	W16L	1550	480	38.0	20	2900	6395	1.80	26
16.9-34	8	T/T	W15L	1580	437	37.0	20	2385	5260	1.60	23
18.4-34	10	T/T	W16L	1650	480	38.0	20	2775	6120	1.60	23
13.6-38	8	T/T	W12	1565	345	35.0	23	1910	4210	2.00	28
18.4-38	8	T/T	W16L	1750	480	38.0	21	2715	5985	1.40	20
	10	T/T	W16L	1750	480	38.0	21	3160	6965	1.80	26

TT = TUBE TYPE, TL = TUBELESS

TT = TUBE TYPE, TL = TUBELESS



601



600



458



601

*LONG MILEAGE R1

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	S.D.(mm)	LUG (ea)	MAX.LOAD		INFLATION	
								kg	lbs	kg/cm ²	psi
7.5L-15	6	T/T	6LB	772	222	23.0	17	800	1764	3.80	54
7-16	6	T/L	W6	740	183	25.0	16	500	1100	2.60	37
8-16	4	T/L	W6	790	201	25.0	16	475	1045	1.60	23
	6	T/L	W6	790	201	25.0	16	600	1325	2.40	34
9.5-16	6	T/L	8LB	848	248	30.0	16	725	1600	2.20	32
9.5-20	6	T/T	W8	946	240	31.0	18	840	1852	2.20	32
	6	T/L	W8	946	240	31.0	18	840	1852	2.20	32
11.2-20	8	T/T	W9	999	278	32.0	18	1120	2469	2.40	34
11.2-24	6	T/L	W10	1100	280	32.0	17	1045	2305	1.80	26
12.4-24	6	T/T	W11	1150	318	37.0	18	1200	2646	1.60	23
	6	T/L	W11	1150	318	37.0	18	1200	2646	1.60	23
	8	T/T	W11	1150	318	37.0	18	1445	3186	2.20	32
13.6-24	6	T/L	W12	1210	345	36.0	19	1340	2954	1.60	23
	8	T/L	W12	1210	345	36.0	19	1615	3560	2.20	32
	8	T/T	W12	1210	345	36.0	19	1615	3560	2.20	32
14.9-24	6	T/T	W12	1275	375	37.0	19	1510	3329	1.40	20
	6	T/L	W12	1275	375	37.0	19	1510	3329	1.40	20
	8	T/T	W12	1275	375	37.0	19	1750	3860	1.80	26
	8	T/L	W12	1275	375	37.0	19	1750	3860	1.80	26
16.9-24	6	T/T	W15L	1340	445	36.0	18	1550	3417	1.20	17
	6	T/L	W15L	1340	445	36.0	18	1550	3417	1.20	17
12.4-28	6	T/T	W11	1260	320	36.6	20	1275	2811	1.60	23
	6	T/L	W11	1260	320	36.6	20	1275	2811	1.60	23
	8	T/T	W11	1260	320	36.6	20	1510	3329	2.20	32
14.9-28	8	T/T	W13	1378	378	34.0	18	1865	4112	1.80	26
	10	T/T	W13	1378	378	34.0	18	2090	4608	2.20	32
	10	T/L	W13	1378	378	34.0	18	2090	4608	2.20	32
14.9-30	8	T/T	W13	1430	398	34.0	19	1930	4255	1.80	26
16.9-30	6	T/L	W15L	1490	445	36.0	21	1900	4189	1.20	17
	8	T/T	W15L	1490	445	36.0	21	2245	4949	1.60	23
18.4-30	8	T/T	W16L	1540	480	38.0	20	2510	5534	1.60	23
	12	T/T	W16L	1540	480	38.0	20	3250	7165	2.30	33
	12	T/L	W16L	1540	480	38.0	20	3250	7165	2.30	33
	14	T/T	W16L	1540	480	38.0	20	3405	7510	2.60	38
18.4-34	6	T/L	W16L	1645	490	38.0	22	2250	4960	1.20	17
	8	T/T	W16L	1645	490	38.0	22	2565	5655	1.40	20
	10	T/T	W16L	1645	490	38.0	22	2775	6118	1.60	23

TT = TUBE TYPE, TL = TUBELESS

600

*R1

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	S.D.(mm)	LUG (ea)	MAX.LOAD		INFLATION	
								kg	lbs	kg/cm ²	psi
8.3-24	6	T/T	W7	1000	210	30.0	18	810	1786	2.40	34

458

*R1

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	S.D.(mm)	LUG (ea)	MAX.LOAD		INFLATION	
								kg	lbs	kg/cm ²	psi
6-12	4	T/T	5JA	580	152	15.0	16	268	591	2.00	28
	4	T/L	5JA	580	152	15.0	16	268	591	2.00	28
7-12	6	T/T	5JA	615	168	18.5	17	390	860	2.30	33
	6	T/L	5JA	615	168	18.5	17	390	860	2.30	33
11.2-16	6	T/T	W10L	902	305	35.0	17	755	1665	2.20	32
	6	T/L	W10L	902	305	35.0	17	755	1665	2.20	32

TT = TUBE TYPE, TL = TUBELESS



617



603



617

*LONG MILEAGE RIW

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	S.D.(mm)	LUG (ea)	MAX.LOAD		INFLATION	
								kg	lbs	kg/cm ²	psi
160/90-12	4	T/T	4.00	632	158	26.0	13	325	716	1.80	26
7-14	6	T/T	5JA	690	173	26.0	14	440	970	2.40	34
7-16	6	T/T	W6	740	183	28.0	15	500	1102	2.60	37
8-16	6	T/T	W6	789	198	29.0	13	600	1323	2.40	34
9.5-16	6	T/T	W8	855	251	43.0	14	725	1598	2.20	32
8-18	8	T/T	W6	839	195	32.0	14	780	1720	3.20	46
9.5-18	8	T/T	W8	901	250	45.0	16	900	1984	2.80	40
8.3-20	8	T/T	W7	890	205	45.0	15	825	1819	3.20	46
9.5-20	8	T/T	W8	943	248	40.0	16	970	2138	2.80	40
11.2-20	8	T/T	W9	1005	297	48.0	14	1120	2469	2.40	34
9.5-24	8	T/T	W8	1050	241	43.5	16	1130	2491	3.00	43
11.2-24	8	T/T	W10	1120	297	49.0	15	1135	2502	2.40	34
12.4-24	8	T/T	W11	1175	308	50.0	16	1445	3186	2.20	32
13.6-24	8	T/T	W12	1210	345	54.0	16	1615	3560	2.20	32
14.9-24	8	T/T	W13	1265	378	50.0	15	1750	3858	1.80	26
13.6-26	8	T/T	W12	1260	345	55.0	15	1580	3483	2.00	28
13.6-28	8	T/T	W12	1310	345	53.5	16	1645	3627	2.00	28
14.9-28	8	T/T	W13	1365	390	55.5	16	1865	4112	1.80	26
14.9-30	8	T/T	W13	1419	384	55.0	17	1930	4255	1.80	26
16.9-28	10	T/T	W15L	1460	450	57.0	18	2430	5355	2.00	28
16.9-30	8	T/T	W15L	1485	440	58.0	19	2245	4949	1.60	23
18.4-30	8	T/T	W16L	1536	465	55.0	19	2510	5534	1.60	23
16.9-34	8	T/T	W15L	1575	450	58.0	19	2385	5258	1.60	23
18.4-34	10	T/T	W16L	1635	467	55.0	20	2775	6118	1.60	23

603

*RIW

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	S.D.(mm)	LUG (ea)	MAX.LOAD		INFLATION	
								kg	lbs	kg/cm ²	psi
6-12	4	T/T	5JA	600	155	15.0	16	270	590	2.00	28
9.5-18	6	T/T	W8	901	250	43.0	16	600	1323	1.40	20
	8	T/T	W8	901	250	43.0	16	900	1984	2.80	40
8.3-20	6	T/T	W7	890	202	43.0	15	710	1565	2.40	34
9.5-20	4	T/T	W8	943	240	42.0	16	645	1422	1.40	20
	6	T/T	W8	943	240	42.0	16	840	1852	2.20	32
8.3-22	8	T/T	W8	943	240	42.0	16	970	2138	2.80	40
	4	T/T	W7	935	212	43.0	16	600	1323	1.60	23
9.5-22	6	T/T	W7	935	212	43.0	16	760	1675	2.40	34
	4	T/T	W8	993	225	42.5	16	690	1521	1.40	20
9.5-24	6	T/T	W8	993	225	42.5	16	900	1984	2.20	32
	8	T/T	W8	993	225	42.5	16	1090	2400	3.00	43
12.4-24	4	T/T	W7	1056	224	42.5	16	740	1631	1.40	20
	6	T/T	W7	1056	224	42.5	16	940	2072	2.20	32
13.6-24	8	T/T	W7	1056	224	42.5	16	1130	2490	3.00	43
	6	T/T	W11	1156	315	48.5	16	1200	2646	1.60	23
12.4-26	8	T/T	W11	1156	315	48.5	16	1445	3186	2.20	32
	6	T/T	W12	1220	345	54.0	16	1340	2954	1.60	23
13.6-26	8	T/T	W12	1220	345	54.0	16	1615	3560	2.20	32
	4	T/T	W11	1220	318	60.0	14	970	2138	1.20	17
11.2-28	6	T/T	W11	1220	318	60.0	14	1145	2524	1.60	23
	4	T/L	W11	1268	341	54.0	15	1065	2348	1.00	14
12.4-28	6	T/T	W11	1270	341	54.0	15	1400	3086	1.60	23
	8	T/T	W11	1270	341	54.0	15	1580	3483	2.00	28
13.6-28	8	T/T	W10	1205	292	48.0	16	1305	2877	2.40	34
	6	T/T	W11	1248	317	48.5	17	1275	2811	1.60	23
14.9-28	8	T/T	W11	1248	317	48.5	17	1510	3329	2.20	32
	6	T/T	W12	1320	350	52.4	16	1430	3153	1.60	23
16.9-30	8	T/T	W12	1320	350	52.4	16	1645	3627	2.00	28
	6	T/T	W13	1378	385	54.8	16	1610	3549	1.40	20
18.4-30	8	T/T	W13	1378	385	54.8	16	1865	4112	1.80	26
	8	T/T	W13	1419	384	54.5	18	1930	4255	1.80	26
12.4-32	8	T/T	W15L	1490	445	58.0	19	2245	4949	1.60	23
16.9-34	8	T/T	W16L	1533	467	49.5	20	2510	5534	1.60	23
18.4-34	8	T/T	W11	1360	315	48.5	19	1545	3406	2.00	28
13.6-36	8	T/T	W15L	1575	445	58.0	20	2385	5258	1.60	23
	10	T/T	W16L	1635	477	49.5	21	2775	6118	1.60	23
13.6-38	6	T/T	W12	1521	351	55.3	19	1615	3560	1.60	23
	8	T/T	W12	1521	351	55.3	19	1890	4167	2.00	28
16.9-38	8	T/T	W12	1570	350	56.5	20	1910	4211	2.00	28
18.4-38	8	T/T	W15L	1695	431	57.7	22	2520	5556	1.60	23
	8	T/T	W16L	1758	467	49.5	22	2715	5985	1.40	20

TT = TUBE TYPE, TL = TUBELESS

TT = TUBE TYPE, TL = TUBELESS



632



602



605



532



501A



618



632

*RIW

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	S.D.(mm)	LUG (ea)	MAX.LOAD		INFLATION	
								kg	lbs	kg/cm ²	psi
8.3-24	6	T/T	W7	1000	214	38.0	14	810	1786	2.40	34

602

*RIW

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	S.D.(mm)	LUG (ea)	MAX.LOAD		INFLATION	
								kg	lbs	kg/cm ²	psi
11.2-24	4	T/T	W10	1105	283	42.5	15	845	1860	1.20	17
	6	T/T	W10	1105	283	42.5	15	1045	2300	1.80	26
	8	T/T	W10	1105	283	42.5	15	1235	2720	2.40	34
12.4-38	8	T/T	W11	1515	315	37.0	24	1780	3924	2.20	32

605

*RIW

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	S.D.(mm)	LUG (ea)	MAX.LOAD		INFLATION	
								kg	lbs	kg/cm ²	psi
5-12	4	T/T	4JA	545	127	22.0	12	220	485	2.40	34
6-14	4	T/T	5JA	648	157	22.5	14	305	672	2.00	28
	6	T/T	5JA	648	157	22.5	14	370	816	2.80	40
	6	T/L	5JA	648	157	22.5	14	370	816	2.80	40
7-16	4	T/T	5JA	740	175	27.2	15	405	893	1.80	26
	6	T/T	5JA	740	175	27.2	15	500	1102	2.60	37
	6	T/L	5JA	740	175	27.2	15	500	1102	2.60	37

532

*RIW

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	S.D.(mm)	LUG (ea)	MAX.LOAD		INFLATION	
								kg	lbs	kg/cm ²	psi
14.9-24	6	T/T	W13	1268	385	49.0	15	1510	3329	1.40	20
	8	T/T	W13	1268	385	49.0	15	1750	3858	1.80	26

501A

*RIW

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	S.D.(mm)	LUG (ea)	MAX.LOAD		INFLATION	
								kg	lbs	kg/cm ²	psi
5.00-12	4	T/T	3.00	585	130	23.5	12	255	562	2.00	28
6.00-12	4	T/T	4.00	632	158	26.0	13	325	716	1.80	26
	4	T/L	4.00	632	158	26.0	13	325	716	1.80	26
7-14	4	T/T	5JA	690	170	25.0	14	370	816	1.80	26
	6	T/T	5JA	690	170	25.0	14	440	970	2.40	34
	6	T/L	5JA	690	170	25.0	14	440	970	2.40	34
6.00-16	4	T/T	4.00	735	165	26.0	13	420	926	2.00	28

> FRONT(F-2)

618

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	S.D.(mm)	LUG (ea)	MAX.LOAD		INFLATION	
								kg	lbs	kg/cm ²	psi
7.50-16	8	T/T	5.50	805	213	9.0	17	775	1710	3.70	52



FIELD

TURF

ROAD

SNOW



VARIOUS USE




NEW

HS623

HYBRID
TRACTOR TIRE

TECHNOLOGY

VERSATILE, "3 IN 1" TIRE TECHNOLOGY

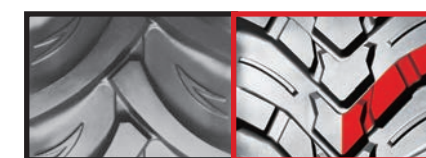

R1(BAR)

+



R3(TURF)

+



R4(IND)

Adaptive design for optimized performance from road to fields



COMFORT ON THE ROAD



Excellent stability at speed

> HYBRID

623

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	S.D.(mm)	LUG (ea)	MAX.LOAD		INFLATION	
								kg	lbs	kg/cm ²	psi
18X8.50-10	6	T/L	7.00	453	200	10.5	16	400	880	2.20	32
23X8.50-12	6	T/L	7.00	578	213	11.5	19	560	1230	2.40	34
26X12.00-12	6	T/L	10.50	658	303	13.5	16	975	2150	2.10	30
25X8.50-14	6	T/L	7.00	644	218	11.0	19	630	1390	2.20	32
10-16.5	6	T/L	8.25	785	268	14.0	22	1060	2340	3.10	45
12-16.5	6	T/L	9.75	845	307	15.5	20	1250	2760	2.80	40
14-17.5	6	T/L	10.50	937	360	17.0	20	1450	3200	2.10	30
43X16.00-20	6	T/L	W14L	1110	410	22.0	19	1850	4080	2.10	30

* 15-19.5, 17.5L-24 AND 16.9-24 _ TO BE READY IN THE NEAR FUTURE

AGRICULTURAL TIRE

HYBRID



482



610



> LAWN & GARDEN

482

*R3

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	S.D.(mm)	MAX.LOAD		INFLATION	
							kg	lbs	kg/cm ²	psi
18X8.50-8	4	T/L	7.00	453	202	9.0	370	816	1.50	22
18X8.50-10	4	T/L	7.00	453	200	7.5	370	816	1.50	22
20X8.00-10	4	T/L	6.00	500	200	8.0	410	910	1.70	24
23X8.50-12	4	T/L	7.00	575	214	9.0	506	1116	1.50	22
	6	T/L	7.00	575	214	9.0	653	1440	2.40	34
26X12.00-12	4	T/L	10.50	655	302	12.0	807	1779	1.40	20
25X8.50-14	6	T/L	7.00	643	220	8.8	745	1642	2.20	32
	8	T/L	7.00	643	220	8.8	900	1984	3.00	43
27X8.50-15	4	T/L	7.00	680	214	9.0	560	1235	2.10	30
	6	T/L	7.00	680	214	9.0	775	1709	2.50	36
27X10.50-15	4	T/L	8.00	691	259	9.0	600	1323	2.10	30
28X8.50-15	4	T/L	7.00	711	215	9.0	650	1433	2.10	30
29X12.50-15	4	T/L	10.00	742	300	9.5	600	1323	1.40	20
36X13.50-15	4	T/L	10.00	914	360	9.5	1180	2601	1.40	20
345/80-16	4	T/L	12.00	980	365	19.0	710	1565	1.00	14
	8	T/L	12.00	980	365	19.0	1060	2335	1.90	27
33X12.50-16.5	4	T/L	9.75	830	315	9.5	1061	2339	2.10	30
41X14.00-20	4	T/L	11.00	1067	369	17.5	1415	3119	1.80	26
44X18.00-20	4	T/L	14.00	1150	464	20.0	1550	3420	1.40	20

610

*R4

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	S.D.(mm)	MAX.LOAD		INFLATION		REMARKS
							kg	lbs	kg/cm ²	psi	
18X8.50-10	4	T/L	7.00	453	200	13.0	370	816	1.50	22	
	6	T/L	7.00	453	200	13.0	490	1080	2.40	34	
20X8.00-10	4	T/L	6.00	494	196	11.0	550	1213	2.80	40	
165/60-12	6	T/L	5.00	540	162	10.0	510	1125	3.20	46	
23X8.50-12	4	T/L	7.00	574	213	11.0	667	1470	2.50	36	
	6	T/L	7.00	574	213	11.0	820	1810	3.50	50	
26X12.00-12	4	T/L	10.50	653	303	15.5	800	1764	1.40	20	
25X8.50-14	6	T/L	7.00	655	220	15.0	965	2130	3.50	50	
27X8.50-15	6	T/L	7JA	686	216	14.0	710	1565	3.10	45	
27X12.50-15	4	T/L	10.00	713	285	13.5	1060	2337	1.80	26	
28X8.50-15	6	T/L	7.00	715	225	15.0	1305	2875	3.10	45	
10-16.5	6	T/L	8.25	789	264	15.5	1610	3549	3.25	46	
12-16.5	4	T/L	9.75	830	310	15.5	1615	3560	2.10	30	
	6	T/L	9.75	830	310	15.5	1915	4220	2.80	40	
14-17.5	4	T/L	10.50	937	356	19.0	1700	3748	1.40	20	
	6	T/L	10.50	937	356	19.0	2185	4817	2.10	30	
	14	T/L	10.50	937	356	19.0	3875	8540	5.60	80	SKID STEER
10.5/80-18	6	T/L	W9	907	270	23.0	1450	3195	2.20	32	
15-19.5	6	T/L	11.75	1019	389	21.0	2780	6130	2.10	30	
	8	T/L	11.75	1019	389	21.0	3290	7250	2.80	40	
43X16.00-20	4	T/L	W14L	1110	410	21.0	1340	2950	1.40	20	
	6	T/L	W14L	1110	410	21.0	1685	3720	2.10	30	
14.9-24	6	T/L	W12	1236	398	28.0	1950	4300	1.70	24	
	8	T/L	W12	1236	398	28.0	2300	5080	2.10	30	
	12	T/L	W12	1236	398	28.0	2900	6390	2.95	42	
420/70-24	6	T/L	W15L	1193	443	27.0	1795	3960	1.40	20	
16.9-24	6	T/L	W15L	1313	442	27.0	2240	4940	1.50	22	
	10	T/L	W15L	1313	442	27.0	2900	6390	2.20	32	BACKHOE
	12	T/L	W15L	1313	442	27.0	3250	7165	2.70	38	BACKHOE
17.5L-24	6	T/L	W15L	1241	445	26.0	2000	4409	1.40	20	
	12	T/L	W15L	1241	445	26.0	3000	6610	2.55	36	BACKHOE
19.5L-24	8	T/L	W16L	1314	480	26.5	2725	6007	1.65	23	
	12	T/L	W16L	1314	480	26.5	3450	7600	2.40	34	BACKHOE

TT = TUBE TYPE, TL = TUBELESS

TT = TUBE TYPE, TL = TUBELESS



GOLF CART

481

486

486A

487



TRAILER / ATV / MISCELLANEOUS

611

619

456

> GOLF CART

481

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	MAX.LOAD		INFLATION	
						kg	lbs	kg/cm ²	psi
18X8.50-8	4	T/L	7.00	452	213	370	816	1.50	22
	6	T/L	7.00	452	213	475	1047	2.30	33

486

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	MAX.LOAD		INFLATION	
						kg	lbs	kg/cm ²	psi
18X8.50-8	6	T/L	7.00	455	210	475	1047	2.40	34

486A

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	MAX.LOAD		INFLATION	
						kg	lbs	kg/cm ²	psi
18X7.00-8	6	T/L	5.20	450	175	420	926	3.10	45

487

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	MAX.LOAD		INFLATION	
						kg	lbs	kg/cm ²	psi
190/50-12	6	T/L	6.00	510	185	550	1213	3.20	46

> TRAILER

611

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	MAX.LOAD		INFLATION	
						kg	lbs	kg/cm ²	psi
10.0/80-12	8	T/L	7.00	700	245	1250	2756	3.20	46
11.5/80-15.3	10	T/L	9.00	840	295	1950	4299	3.50	50

> ATV

619

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	S.D.(mm)	LUG (ea)	MAX.LOAD		INFLATION	
								kg	lbs	kg/cm ²	psi
22X7-10	4	T/T	5.50	560	170	9	23	100	220	0.35	5
22X10-10	4	T/T	8.00	560	250	10.5	24	136	300	0.35	5

> MISCELLANEOUS

456

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	MAX.LOAD		INFLATION	
						kg	lbs	kg/cm ²	psi
26X10.00-12	8	T/T	8.50	660	260	980	2160	3.75	53

TT = TUBE TYPE, TL = TUBELESS

TT = TUBE TYPE, TL = TUBELESS



436



431A



459



436

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	MAX.LOAD		INFLATION	
						kg	lbs	kg/cm ²	psi
4.00-9	2	T/T	3.00	460	111	110	243	1.20	17
	4	T/T	3.00	460	111	200	440	3.25	46
4.00-12	2	T/T	3.00	535	111	140	309	1.20	17
	4	T/T	3.00	535	111	250	551	3.25	46

431A

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	MAX.LOAD		INFLATION	
						kg	lbs	kg/cm ²	psi
20X10.00-10	6	T/T	8.50	508	240	565	1246	2.80	40

459

SIZE	PR	TYPE	R.W.	O.D.(mm)	O.W.(mm)	MAX.LOAD		INFLATION	
						kg	lbs	kg/cm ²	psi
120/90-26	4	T/T	4JA	940	123	525	1157	2.40	34
	6	T/T	4JA	940	123	600	1323	3.00	43



TT = TUBE TYPE, TL = TUBELESS

Made in Korea

AGRICULTURAL TIRES

TRACTOR / FRONT /
HYBRID / LAWN & GARDEN /
GOLF CART / TRAILER / ATV /
MISCELLANEOUS



ISO 9001 | ISO 14001 | -MARK

HUNG-A

HUNG-A CO.,LTD

CORPORATE OFFICE

77, Eosil-ro, Yangsan-si Gyeongsangnam-do, Korea
T 82-55-371-3731, 3734, 3735, 3785 F 82-55-366-4700
www.hunga.com/eng

USA OFFICE

TIRON TIRES AND WHEELS USA INC.

760 Atlanta South PKWY, Suite 100 Colleague Park, GA 30349
T 470-365-2115 F 470-365-2116
www.tirontires.com

Printed in Korea 2021